


## General info

## Technical - Recessed lights

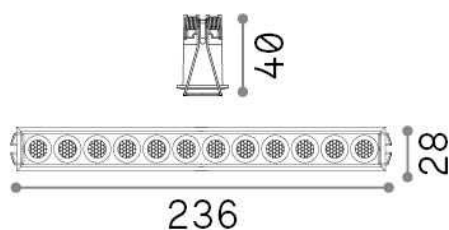

|              |                           |
|--------------|---------------------------|
| Ean          | 8021696327518             |
| Item         | LIKA FI SLIM 20W 3000K WH |
| Installation | Recessed lights           |
| Guarantee    | 5 years                   |
| Gross weight | 0.41 kg                   |
| Volume       | 0.00221 m <sup>3</sup>    |

## Technical info

|                         |  |
|-------------------------|--|
| Net weight              | 0.3 kg   |
| Insulation class        | II   |
| Protection index        | IP20   |
| Compliance              | CE   |
| Operating temperature   | 0° ~ +40 °C  |
| Dimmer                  | NO, On-Off   |
| Power output            | 220-240 V AC 50/60 Hz  |
| Power supply            | Separate, included<br>Replaceable (by qualified operators only),<br>electronic |
| Recessed specifications | 231 x 23 - h. ≥ 45 , 5-30  |

## Source info

|                        |                       |
|------------------------|-----------------------|
| Integrated source      | Integrated LED module |
| Replaceable source     | No                    |
| Power                  | 19 W                  |
| Emission               | Direct                |
| Max consumption        | max 19,00 W           |
| Features LED           | LED SMD               |
| CCT LED                | 3000 K                |
| Duration LED (t. 25°C) | 30000 h               |
| CRI                    | > 90                  |
| Light beam             | 32°                   |
| UGR Maximum            | < 19                  |
| Light beam flux        | 2000 lm               |
| Useful light flux      | 1650 lm               |
| Photobiological risk   | 2                     |